



## DL-1000-STE

Dog Basin with adult basin, ADA friendly

## DL-1000-DWC-STE

Dog Basin with adult basin and hose bib, ADA friendly

Outdoor fountain ideal for parks and recreational areas. Powder-coated exterior over a corrosion-resistant, 300 Series stainless steel base material to provide protection from the elements.

### STANDARD FEATURES

- Heavy-gauge construction with tamper-resistant screws that resist stains and corrosion.
- Vandal-resistant bubblers feature chrome-plated integral hood guard to prevent contamination from other users, airborne deposits and tampering.
- Pet fountain features slow drainage for easy drinking.
- Available in 4 stunning finishes.
- Ideal for outdoor use.

### SPECIFICATIONS

- Heavy Duty Vandal Resistant Bubblers
- Freeze Resistant Valve Assembly
- 300 Series Stainless
- Dimensions: 26" x 14" x 40-5/16"
- Weight: 157 lbs

### VALVE SPECIFICATIONS

- Minimum/Maximum Pressure 20 to 105 psi.



### ONE YEAR WARRANTY



**FRESH WATER IS A MUST  
AT THE DOG PARK!**



### COLOR SELECTION

Premium heavy-duty outdoor commercial powder-coated stainless steel.

**BLUE**



DWC Hose Bib

**BLACK**



DWC Hose Bib

**GREEN**



DWC Hose Bib

**GRAY**



DWC Hose Bib

**MOUNTING INSTRUCTIONS and PLUMBING CONNECTIONS**

Provide solid, well-drained surface to mount pedestal fountain (concrete pad recommended) with adequate support (300 lb. load minimum). (8) 3/8" minimum fasteners (not included) should be attached firmly to mounting surface in order to secure unit. (Refer to rough-in diagram).

Modified low stream height bubbler for pet fountain.


Locate and install plumbing through ground as required.  
**NOTE:** Unit is not furnished with service valve.

Position pedestal over plumbing and secure base to fasteners. Remove access panels and connect supply and water lines. Turn on water supply and check for leaks. Reassemble access panels to pedestal.


**Trap and service stop not included.**

**OPERATING PRESSURES:**  
 Supply water 20 – 105 psi maximum

**TOP VIEW**

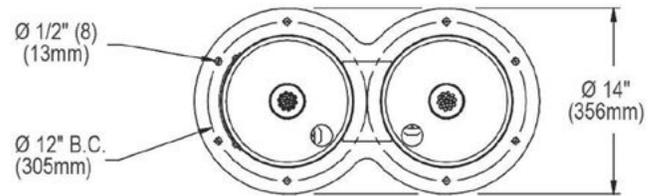

**SIDE & FRONT VIEWS**

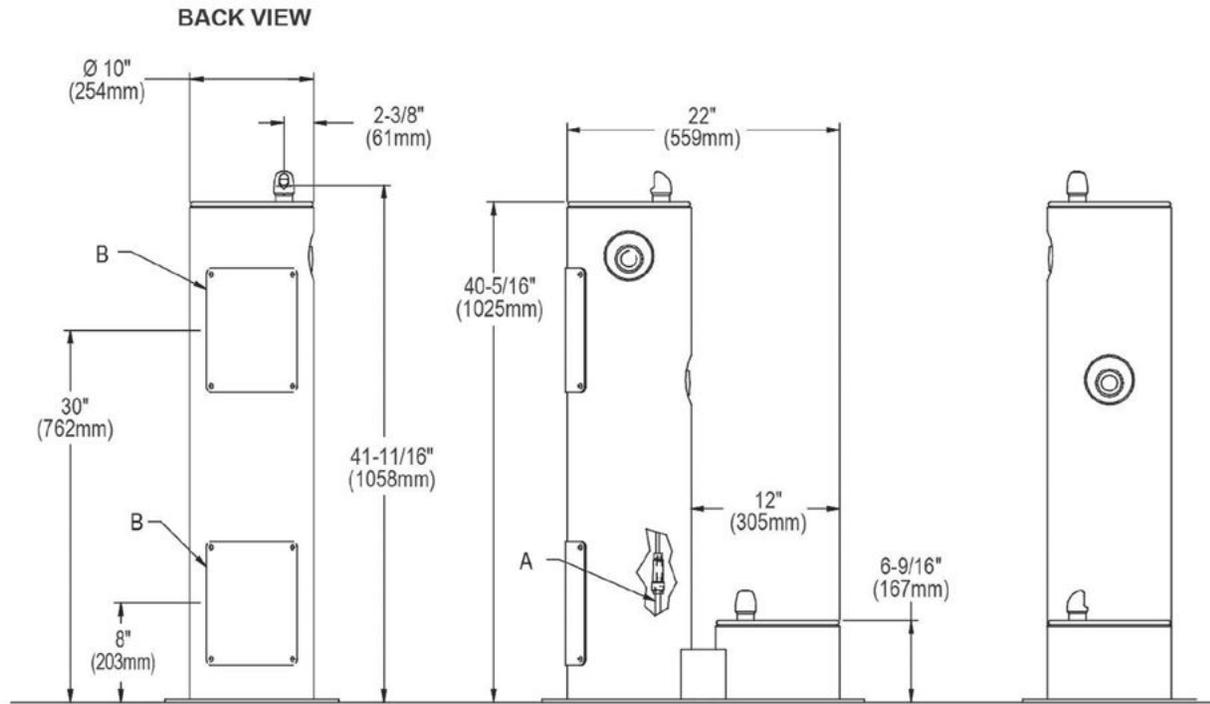

A = 3/8" O.D. UNPLATED COPPER TUBE CONNECT  
 SHUT OFF VALVE BY OTHERS  
 B = ACCESS PANEL (8" x 10")