



DL-DWC-STE

Hose Bib

Outdoor fountain ideal for parks and recreational areas. Powder-coated exterior over a corrosion-resistant, 300 Series stainless steel base material to provide protection from the elements.

STANDARD FEATURES

- Heavy-gauge construction with tamper-resistant screws that resist stains and corrosion.
- Vandal-resistant bubblers feature chrome-plated integral hood guard to prevent contamination from other users, airborne deposits and tampering.
- Pet fountain features slow drainage for easy drinking.
- Available in 4 stunning finishes.
- Ideal for outdoor use.

SPECIFICATIONS

- Heavy Duty Vandal Resistant Bubblers
- Freeze Resistant Valve Assembly
- 300 Series Stainless
- Dimensions: 26" x 14" x 40-5/16"
- Weight: 157 lbs

VALVE SPECIFICATIONS

- Minimum/Maximum Pressure 20 to 105 psi.



BLACK



BLUE



GREEN




GRAY

ONE YEAR WARRANTY



**FRESH WATER IS A MUST
AT THE DOG PARK!**

HOSE BIB INSTALLATION INSTRUCTIONS

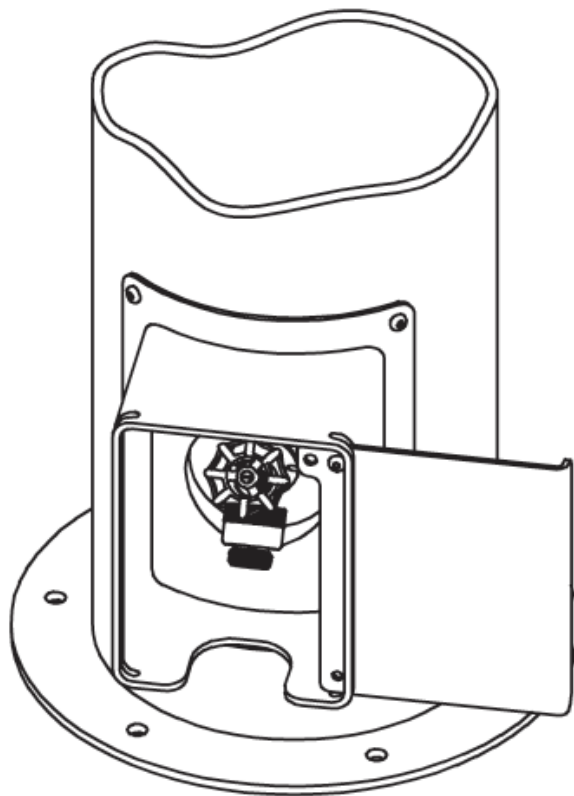

INSTALLER

To assure you install this accessory easily and correctly, PLEASE READ THESE SIMPLE INSTRUCTIONS BEFORE STARTING THE INSTALLATION. CHECK YOUR INSTALLATION FOR COMPLIANCE WITH PLUMBING, ELECTRICAL AND OTHER APPLICABLE CODES.

IMPORTANT

ALL SERVICE TO BE PERFORMED BY AN AUTHORIZED SERVICE PERSON

IMPORTANT! INSTALLER PLEASE NOTE.

THE GROUNDING OF ELECTRICAL EQUIPMENT SUCH AS TELEPHONE, COMPUTERS, ETC. TO WATER LINES IS A COMMON PROCEDURE. THIS GROUNDING MAY BE IN THE BUILDING OR MAY OCCUR AWAY FROM THE BUILDING. THIS GROUNDING CAN CAUSE ELECTRICAL FEEDBACK INTO A FOUNTAIN, CREATING AN ELECTROLYSIS WHICH CAUSES A METALLIC TASTE OR AN INCREASE IN THE METAL CONTENT OF THE WATER. THIS CONDITION IS AVOIDABLE BY USING THE PROPER MATERIALS AS INDICATED. ANY DRAIN FITTINGS PROVIDED BY THE INSTALLER SHOULD BE MADE OF PLASTIC TO ELECTRICALLY ISOLATE THE FOUNTAIN FROM THE BUILDING PLUMBING SYSTEM.

INSTALLATION INSTRUCTIONS

PARTS LIST	
ITEM NO.	DESCRIPTION
1	Fitting - Hose Vacuum Breaker
2	Faucet - 1/2" NPT
3	Door - Locking Hose Bib
4	Nut - Lock 1/2" Conduit
5	Elbow - 90° x 1/2" MPT
6	Fitting - Tee 1/2" X 1/2" X 3/8"
7	Tube - 1/2" O.D. X 35.00" Lg.
8	Tube - 3/8" O.D. Tee to Strainer
9	Tube - 1/2" O.D. X 4.38" Lg.
10	Kit - VR Torx Screws/Bit
11	Panel - Locking Hose Bib

1. Shut off water supply to fountain.
2. Determine location for installation of **Hose Bib Accessory**. Remove existing access cover plate. This accessory is designed to replace the existing access cover.
3. Disconnect the **fountain water line** from the main water supply. Connect Tube to existing fountain strainer as shown below.
4. Connect Tee to Tube. Connect main water supply to Tee using 1/2" Copper Tube. **DO NOT TURN MAIN WATER SUPPLY ON AT THIS TIME!**
5. Connect Hose Bib Accessory water line to the Tee and to the Elbow on the Access Panel using 1/2" Copper Tube as shown below, maintain loop in coil to facilitate installation and removal of Access Panel.
6. Turn on main water supply. Check for leaks. If there are leaks, turn off main water supply and correct the water leaks as required. After insuring that all connections are leak free, leave main water supply on and replace any panels that may have been removed in the installation process.
7. Assemble Hose Bib Accessory to the main fountain body.

